


How to use Mercedes W204 207 212 ESL & ELV original A2C-52724 NEC chip


First, replace the NEC chip and motor

Then follow the steps below to synchronize the EIS data.


1) Read ESL data

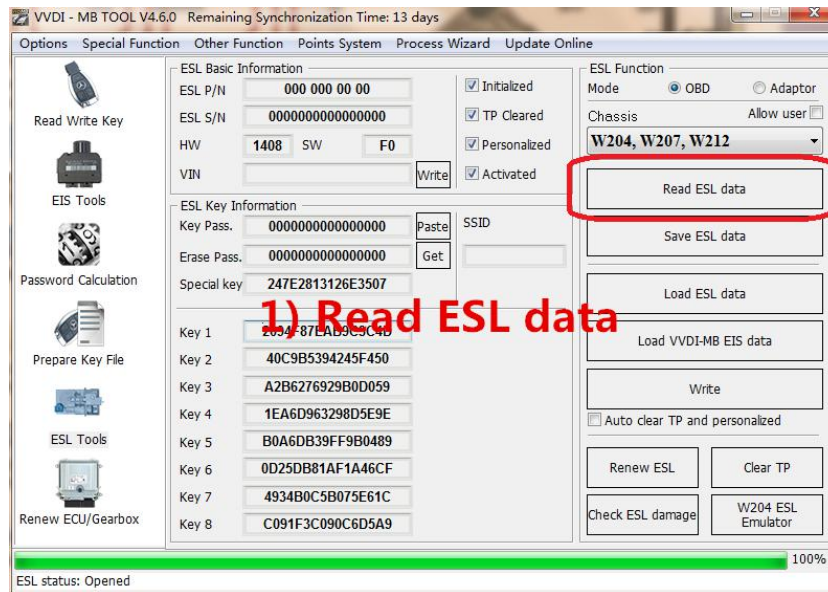

2) Renew ESL, Erase pass: 1111111111111111

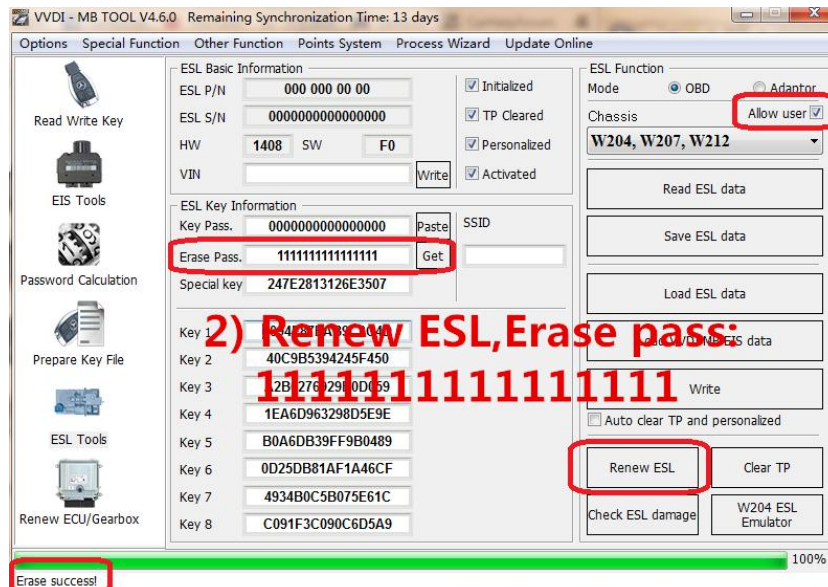

3) Load EIS data, paste key pass, click Auto clear TP and personalized, then click to write

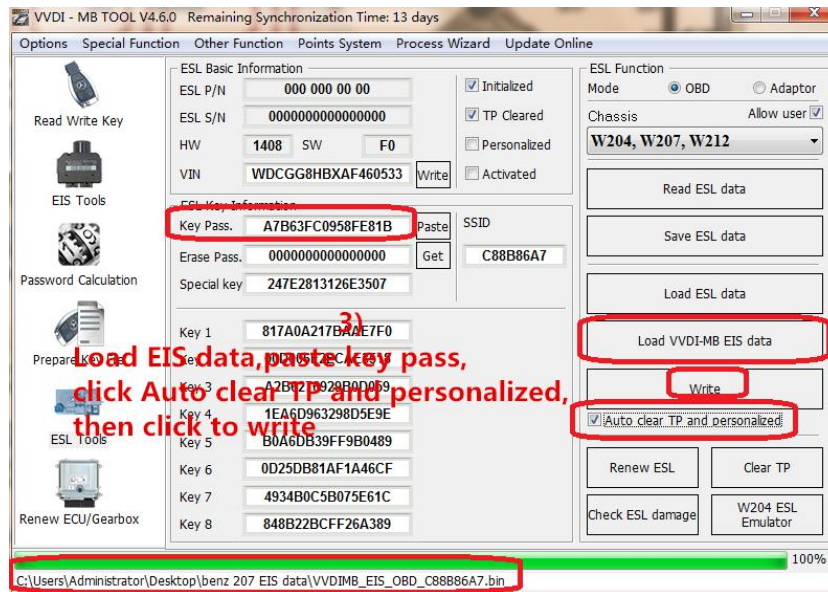

4) DONE!

